

Cadro frame system

- ▶ Base
- ▶ Connecting nodes

Connecting node, 2-way



- ▶ For connecting Cadro profiles
- ▶ One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- ▶ Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 821	9 298 822	1 ea.


Connecting node, 2-way, with height adjustment capability



- ▶ For connecting Cadro profiles
- ▶ Including leg, height adjustable up to 5 mm
- ▶ One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- ▶ Max. load capacity 50 kg / leg
- ▶ Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 823	9 298 824	1 ea.


Connecting node, 3-way, 2D



- ▶ For connecting Cadro profiles
- ▶ One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- ▶ Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 825	9 298 826	1 ea.

Connecting node, 3-way, 2D, with height adjustment capability




- ▶ For connecting Cadro profiles
- ▶ Including leg, height adjustable up to 5 mm
- ▶ One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- ▶ Max. load capacity 50 kg / leg
- ▶ Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 827	9 298 828	1 ea.

Cadro frame system

- Base
- Connecting nodes


Connecting node, 3-way, 3D



- For connecting Cadro profiles
- One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 829	9 298 830	1 ea.



Connecting node, 3-way, 3D, with height adjustment capability



- For connecting Cadro profiles
- Including leg, height 4 mm, height adjustable up to 5 mm
- One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- Max. load capacity 50 kg / leg
- Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 831	9 298 832	1 ea.


Connecting node, 4-way



- For connecting Cadro profiles
- One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 833	9 298 834	1 ea.

Connecting node, 4-way, with height adjustment capability




- For connecting Cadro profiles
- Including leg, height 4 mm, height adjustable up to 5 mm
- One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- Max. load capacity 50 kg / leg
- Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 835	9 298 836	1 ea.

Cadro frame system

- Base
- Connecting nodes, accessories


Connecting node, 5-way



- For connecting Cadro profiles
- One Cadro threaded stud per node arm is required for securing it in the profile, order no. 9 298 859 / 9 298 860, please order separately
- Die-cast zinc

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 837	9 298 838	1 ea.



Threaded stud, M5 x 6 mm



- Self tapping grub screw, M5 x 6 mm, DIN 913
- For securely connecting profiles and connecting nodes without any gaps
- The threaded studs fit into the tapered depressions in the node arms
- We recommend using a 4.5 mm metal drill bit for drilling the hole required in the profile
- 0.8 - 1 Nm torque when using a cordless screwdriver
- Steel

Order no. / Colour		PU
Matt black	Stainless steel look	
9 298 859	9 298 860	25 ea.



Cover cap for M5 threaded stud

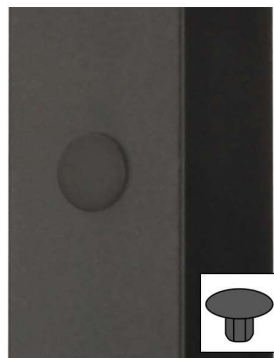

- For covering M5 threaded studs screwed into the profile
- Plastic

Order no. / Colour		PU
black	silver	
9 298 856	9 298 857	25 ea.

Dummy plug

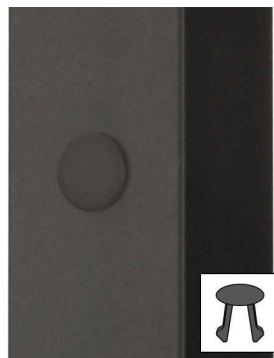

- Cover clip for concealing ø 4 - 6 mm drill holes in the profile
- Plastic black

Order no.	PU
9 298 858	25 ea.